


SCUDO VAN

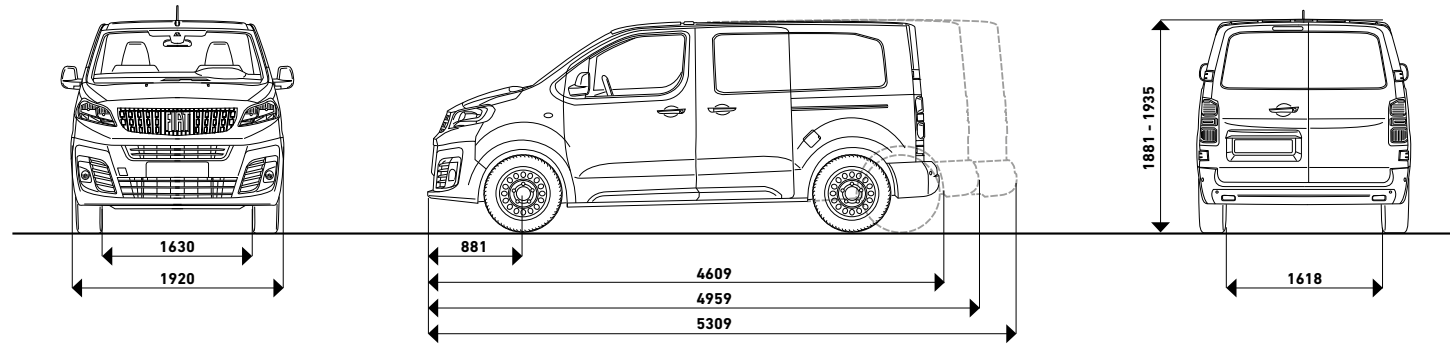


External dimensions (mm)	SHORT	STANDARD	MAXI
Maximum length	4609	4959	5309
Width (excluding mirrors)	1920	1920	1920
Height (in running order)	1892	1881	1935
Wheelbase	2925	3275	3275
Overhang front/rear	881/803	881/803	881/1153
Track front/rear	1630/1618	1630/1618	1630/1618
Load compartment dimensions (mm)			
Length	2162 - 3324*	2512 - 3674*	2862 - 4026*
Maximum width / width between wheel arches	1628 / 1258	1628 / 1258	1628 / 1258
Height	1397	1397	1397
Load threshold height	545	544	600
Rear door: width/height	1282 - 1220	1282 - 1220	1282 - 1220
Side door: width/height	745 - 1238	935 - 1241	935 - 1241
Volume (m³)	4,6 - 5,1*	5,3 - 5,8*	6,1 - 6,8*

Engines (masses - kg)	1.5 Multijets 102 hp S&S	1.5 Multijets 120 hp S&S	2.0 Multijets 145 hp S&S	2.0 Multijets 145 hp S&S AT8	1.5 Multijets 102 hp S&S	1.5 Multijets 120 hp S&S	2.0 Multijets 145 hp S&S	2.0 Multijets 145 hp S&S AT8	2.0 Multijets 180 hp S&S AT8	1.5 Multijets 102 hp S&S	1.5 Multijets 120 hp S&S	2.0 Multijets 145 hp S&S AT8	2.0 Multijets 180 hp S&S AT8
Mass in running order (MRO)	1616	1616	1698	1775	1661	1662	1728	1762	1777	1745	1767	1782	1796
Payload	1079	1079	1132	1020	1034	1033	1102	1033	1013	1085	1333	1318	1304
Gross vehicle weight (GVW)	2695	2695	2830	2795	2695	2695	2830	2795	2790	2830	3100	3100	3100
Gross vehicle weight (GVW) with increased payload	2830	-	3100	3100	2830	-	3100	3100	3100	-	-	-	-
Displacement (cm³)	1499	1499	1997	1997	1499	1499	1997	1997	1997	1499	1499	1997	1997
Max power (kW (HP) / rpm)	75 (102) a 3500	88 (120) a 3500	106 (145) a 3750	106 (145) a 3750	75 (102) a 3500	88 (120) a 3500	106 (145) a 3750	106 (145) a 3750	130 (177) a 3750	75 (102) a 3500	88 (120) a 3500	106 (145) a 3750	130 (177) a 3750
Max torque (Nm / rpm)	270 a 1600	300 a 1750	340 a 2000	370 a 2000	270 a 1600	300 a 1750	340 a 2000	370 a 2000	400 a 2000	270 a 1600	340 a 2000	370 a 2000	400 a 2000
Emission standard level	E6d-FMC												

Transmission	6-speed manual	automatic 8-speed	6-speed manual	automatic 8-speed	6-speed manual	automatic 8-speed
Drive	6-speed manual		automatic 8-speed		6-speed manual	
Clutch	front					
Capacity						
Fuel tank capacity (litres)	69					

SCUDO CREW CAB

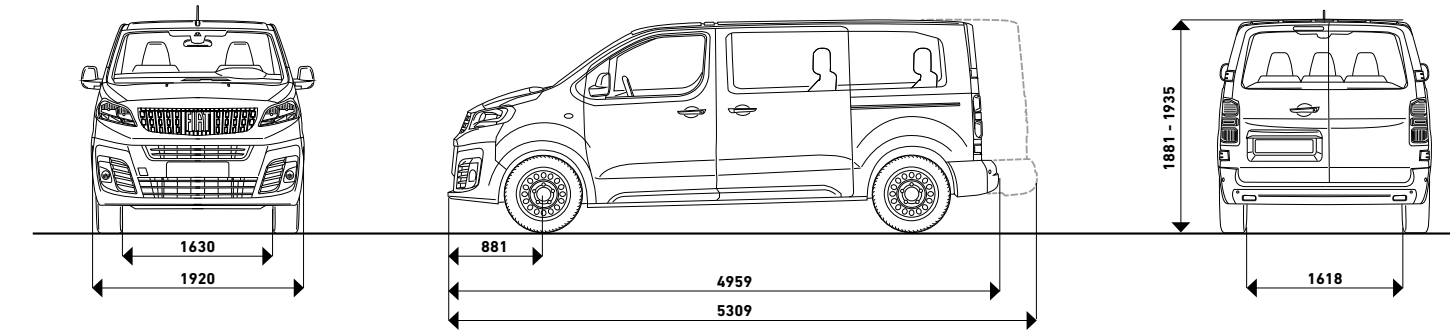


External dimensions (mm)	CREW FIXED CAB		CREW CABIN MOBILE	
	STANDARD	MAXI	STANDARD	MAXI
Maximum length	4959	5309	4959	5309
Width (excluding mirrors)	1920	1920	1920	1920
Height (in running order)	1881	1935	1881	1935
Wheelbase	3275	3275	3275	3275
Overhang front/rear	881 / 803	881 / 1153	881 / 803	881 / 1153
Track front/rear	1630 / 1618	1630 / 1618	1630 / 1618	1630 / 1618
Load compartment dimensions (mm)				
Length	1587	1937	1587 / 1953*	1937 / 2302*
Maximum width / width between wheel arches	1628 / 1258	1628 / 1258	1628 / 1258	1258
Height	1397	1397	1397	1397
Load threshold height	544	600	544	600
Rear door: width/height	1282 - 1220	1282 - 1220	1282 - 1220	1282 - 1220
Side door: width/height	935 - 1241	935 - 1241	935 - 1241	935 - 1241
Volume (m³)	3,2	4	3,2	4

Engines (masses - kg)	1.5 Multijets 120 hp S&S	2.0 Multijets 145 hp S&S	2.0 Multijets 145 hp S&S AT8	2.0 Multijets 180 hp S&S AT8	2.0 Multijets 145 hp S&S	2.0 Multijets 145 hp S&S AT8	2.0 Multijets 180 hp S&S AT8
Mass in running order (MRO)	1735	1810	1840	1840	1840	1880	1880
Payload	960	1020 / 1220*	990 / 1185*	990 / 1185*	1260	1220	1220
Gross vehicle weight (GVW)	2695	2830 / 3030*	2830 / 3030*	2830 / 3030*	3100	3100	3100
Maximum towable weight (braked trailer)	2000	2300 / 2500*	2300 / 2500*	2300 / 2500*	2500	2500	2500
Maximum combined vehicle weight	4230	5000	5000	5000	5000	5000	5000
Displacement (cm³)	1499	1997	1997	1997	1997	1997	1997
Max power (kW (HP) / rpm)	88 (120) a 3500	106 (145) a 3750	106 (145) a 3750	130 (177) a 3750	106 (145) a 3750	106 (145) a 3750	130 (177) a 3750
Max torque (Nm / rpm)	300 a 1750	340 a 2000	370 a 2000	400 a 2000	340 a 2000	370 a 2000	400 a 2000
Emission standard level	E6d-FMC						

Transmission	6-speed manual	automatic 8-speed	6-speed manual	automatic 8-speed
Drive	6-speed manual		automatic 8-speed	
Clutch	front			
Capacity				
Fuel tank capacity (litres)	69			

*Increased payload

E-SCUDO VAN

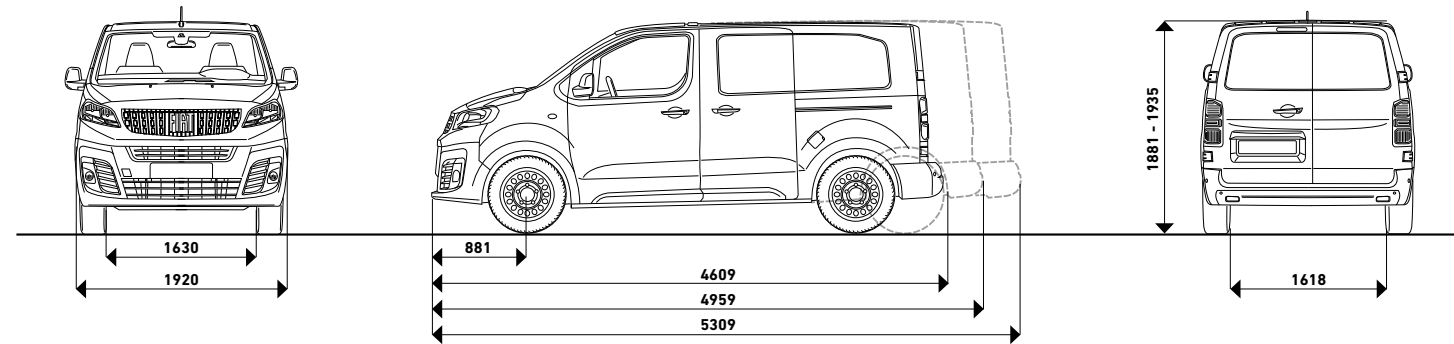

Length	SHORT		STANDARD		MAXI		
	50 kW		50 kW	75 kW	50 kW		75 kW
Battery pack	50 kW		50 kW	75 kW	50 kW		75 kW
Payload	Standard	Increased	Standard	Increased	Standard	Standard	Increased
External dimensions (mm)							
Length	4609		4609		5309		
Width (without mirrors) - mm	1920		1920		1920		
Width (with mirrors) - mm	2204		2204		1935		
Height	1892	>1900*	1881	>1900*	1881	1935	>1900*
Wheelbase	2925		3275		3275		
Overhang front/rear	881 / 803		881 / 803		881 / 1153		
Track front/rear	1630 / 1618		1630 / 1618		1630/1618		
Load compartment dimensions (mm)							
Length	2162 / 3324**		2512 / 3674**		2862 / 4026**		
Maximum width / width between wheel arches	1628 / 1258		1628 / 1258		1628 / 1258		
Height	1397		1397		1397		
Load threshold height	545* / 626*		544* / 613*		600* / 633*		
Rear door: width/height	1282 - 1220		1282 - 1220		1282 - 1220		
Side door: width/height	745 - 1238		935 - 1241		935 - 1241		
Volume (m³)	4,6 - 5,1**		5,3 - 5,8**		6,1 - 6,6**		
Electric Motor							
Electric motor type/poles number	Synchronous permanent magnet/4 poles						
Max power (kW (HP) / rpm)	100						
Max torque (Nm / rpm)	260						
Top speed (km/h)	130						
0-100 km / h (in s) depending on the version	10,8 / 12,1		10,8 / 12,1		11,9 / 13,3		10,8 / 12,1
Range km (WLTP)	Up to 231		Up to 231		Up to 329		Up to 231

Length	SHORT		STANDARD		MAXI		
	50 kW		50 kW	75 kW	50 kW		75 kW
Battery pack	50 kW		50 kW	75 kW	50 kW		75 kW
Payload	Standard	Increased	Standard	Increased	Standard	Standard	Increased
Masses / Versions							
Maximum combined vehicle weight	3 seats: 3840	3 seats: 4100	3 seats: 3875	3 seats: 4100	3 seats: 4100	3 seats: 3905	3 seats: 4100
Gross vehicle weight (GVW)	3 seats: 2840	3 seats: 3100	3 seats: 2875	3 seats: 3100	3 seats: 3905	3 seats: 2905	3 seats: 3100
Mass in running order (MRO) = curb weight + 75kg (driver weight)	3 seats: 1913		3 seats: 1949		3 seats: 2100	3 seats: 1977	
Maximum towable weight (braked trailer)	1000		1000		1000		
Payload including driver	3 seats: 927	3 seats: 1187	3 seats: 926	3 seats: 1151	3 seats: 927	3 seats: 928	3 seats: 1123
Payload without driver	1002	1262	1001	1226	1002	1003	1198

Driving modes	POWER		NORMAL		ECO	
	Power		Normal		Eco	
Power	100		80		60	
Torque	260		210		190	
Driving mode	Power		Normal		Eco	

CONSUMPTION AND EMISSIONS (ICE only)

WLTP mixed cycle consumption l/km	SHORT		STANDARD		MAXI	
	6,181 - 7,208		6,181 - 7,208		6,273 - 7,303	
Multijets 1.5 102	6,181 - 7,208		6,181 - 7,208		6,273 - 7,303	
Multijets 1.5 120	6,166 - 7,177		6,166 - 7,177		-	
Multijets 2.0 145	6,735 - 7,635		6,735 - 7,635		6,901 - 7,913	
Multijets 2.0 145 S&S AT8	6,906 - 8,010		6,906 - 8,010		6,906 - 8,010	
Multijets 2.0 180 S&S AT8	-		6,843 - 7,885		6,843 - 7,885	
WLTP mixed cycle CO₂ emissions g/km						
Multijets 1.5 102	161,92 - 188,83		161,92 - 188,83		164,33 - 191,32	
Multijets 1.5 120	161,53 - 188,03		161,53 - 188,03		-	
Multijets 2.0 145	176,46 - 200,09		176,46 - 200,09		180,82 - 207,33	
Multijets 2.0 145 S&S AT8	181,00 - 209,96		181,00 - 209,96		181,00 - 209,96	
Multijets 2.0 180 S&S AT8	-		179,35 - 206,68		179,35 - 206,68	

Note: All data (e.g. kerb weight, payload, energy consumption, range, etc.) are referred to standard version without optional equipment. Payload data include driver's weight. The electric range and energy consumption values are defined based on official tests, in conformity with the provisions of the EU Regulations in force at the time of homologation. The indicated values are calculated based on the WLTP test procedure. WLTP COMBINED is made by four sub-cycles: Low, Medium, High & Extra-high. WLTP CITY is made by two sub-cycles: Low & Medium and it is representative of an urban cycle.